


RoomAlert Room Alert 3S Planning Worksheet

We've got this.

Print and use this form to plan the sensor build-out for your Room Alert installation. See page 2 for compatible options to write in below. Once your build-out is complete, call AVTECH or your favorite Reseller for a quote or to order.

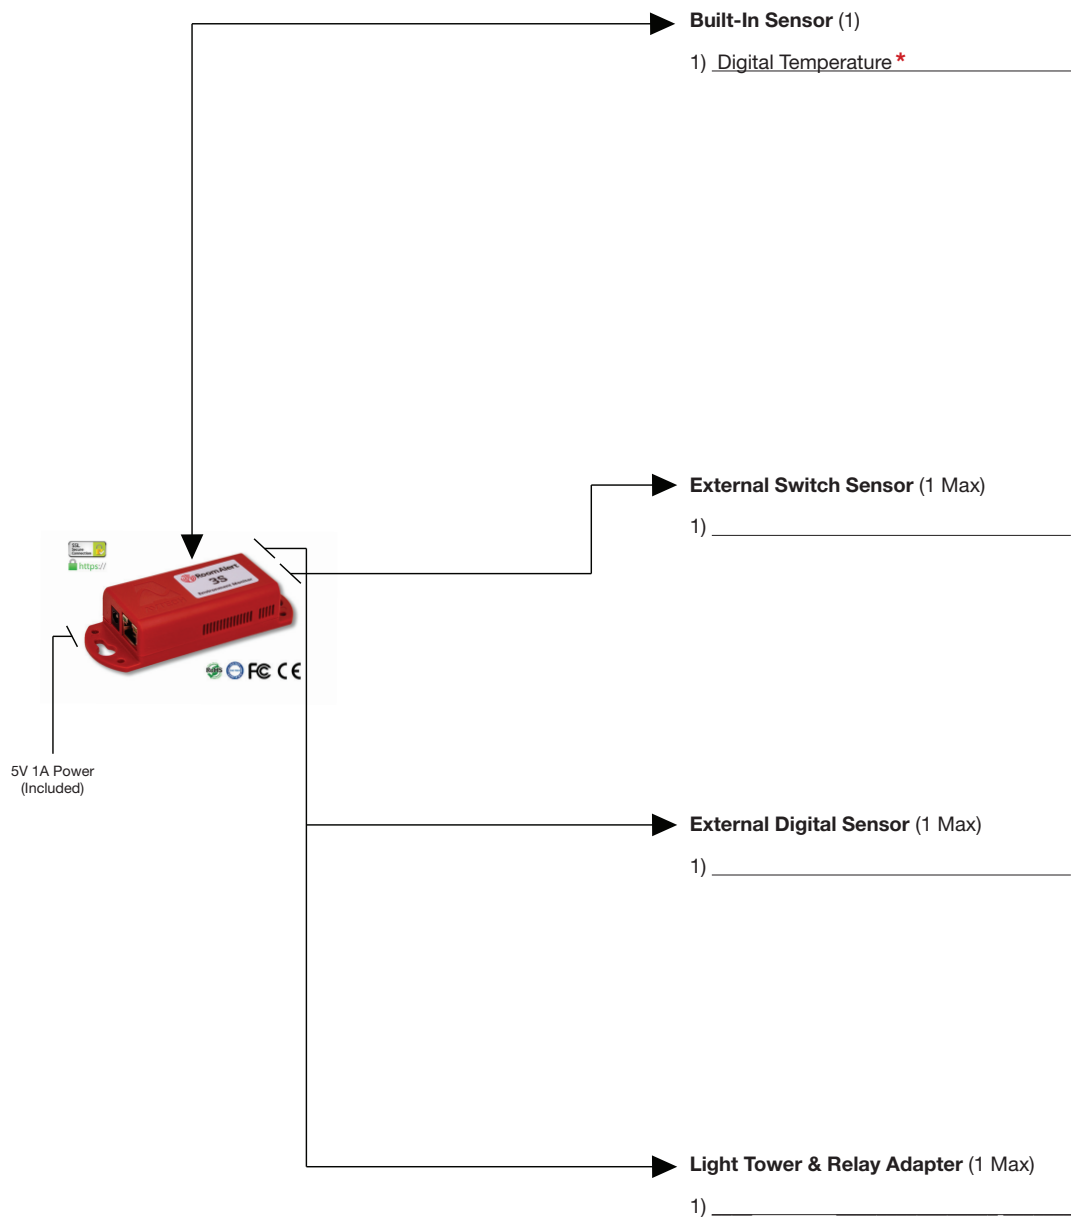

Note: The total sensor capacity of the Room Alert 3S is 3+ sensors. A Light Tower & Relay Adapter can be used through the digital sensor port on this model to allow connection of a Light Tower or Relay Switch Sensor.

* - Included in base package for monitor.

Order Online: RoomAlert.com or Call / Order by Phone: 888.220.6700 · 401.628.1600



RoomAlert Room Alert 3S Planning Worksheet

We've got this.

External Sensor Options:

AVT-241108.04

Digital Sensor Options: (17)

- | | |
|---|--|
| Digital Temperature Sensor (25' Cable) – TMP-SDT-SEN | Digital Outdoor Temperature Sensor (25' Cable) – TMP-DOT-SEN |
| Digital Temperature Sensor (50' Cable) – TMP-DT50-SEN | Digital Outdoor Temperature Sensor (50' Cable) – TMP-DOT50-SEN |
| Digital Temperature Sensor (100' Cable) – TMP-DT100-SEN | Digital Outdoor Temperature Sensor (100' Cable) – TMP-DOT100-SEN |
| Digital Temperature & Humidity Sensor (25' Cable) – RMA-DTH-SEN | Digital Fluid Temperature Sensor (25' Cable) – TMP-DFT-SEN |
| Digital Temperature & Humidity Sensor (50' Cable) – RMA-DTH50-SEN | Digital Fluid Temperature Sensor (50' Cable) – TMP-DFT50-SEN |
| Digital Temperature & Humidity Sensor (100' Cable) – RMA-DTH100-SEN | Digital Fluid Temperature Sensor (100' Cable) – TMP-DFT100-SEN |
| Digital Temperature & Analog Sensor (25' Cable) – RMA-DTA-SEN | Digital Active Power Sensor (10' Cable) – RMA-DAP-SEN |
| Digital Extreme Temperature Sensor (25' Cable) – RMA-DET-SEN | Digital Temperature & Air Flow Sensor (25' Cable) – RMA-DTAF-SEN |
| Digital Particulate & Temperature Sensor (25' Cable) – RMA-DTP-SEN | |

Switch Sensor Options: (13)

- | | |
|--|---|
| Mini UPS & Power Sensor (15-20 minutes) – RMA-MUPS-SEN | 50' Flood Cable Extension – RMA-F050-EXT |
| Power Sensor (100-240V) – RMA-PS1-SEN | Water Tank Level Sensor (NC, Reommended) – RMA-WTL1-SEN |
| Room Entry Sensor – RMA-RE1-SEN | Water Tank Level Sensor (NO) – RMA-WTL2-SEN |
| Smoke Sensor w/Escape Light – RMA-SS1-SEN | Fuel Tank Level Sensor (NC, Recommended) – RMA-FTL1-SEN |
| Flood Sensor (Spot) – RMA-FS2-SEN | Fuel Tank Level Sensor (NO) – RMA-FTL2-SEN |
| Flood Sensor w/8' Flood Cable – RMA-F008-SEN | Motion Sensor – RMA-MOT2-SEN |
| Flood Sensor w/24' Flood Cable – RMA-F024-SEN | |

Analog Sensor Options: (2)

- Current Loop 1 Power Sensor (0-50A, Analog) – RMA-CL1-SEN
- Current Loop 2 Power Sensor (0-250A, Analog) – RMA-CL2-SEN

Light Tower & Relay Switch Sensor Options: (2)

- | | |
|--|---|
| Light Tower w/Audio & Adapter - STRYG-LT/A | Relay Switch Sensor & Adapter - RMA-RELAY-SEN/A |
|--|---|

Ordering Instructions: Print and use this form to plan the sensor build-out for your Room Alert installation. Use the open fields on page 1 to enter desired sensors using the options above. When you have the desired configuration, use this document to determine the quantity of items that you desire in a quote for purchase. Then, call your Reseller or Product Specialist and ask for a quote. If email is preferred, scan page 1 and email it with your contact information and request a quote. If you are not working with a Reseller or Product Specialist at this time, please email your request to Sales@RoomAlert.com. Thank you.

Notes: _____

